




Willtek 9101 Handheld Spectrum Analyzer

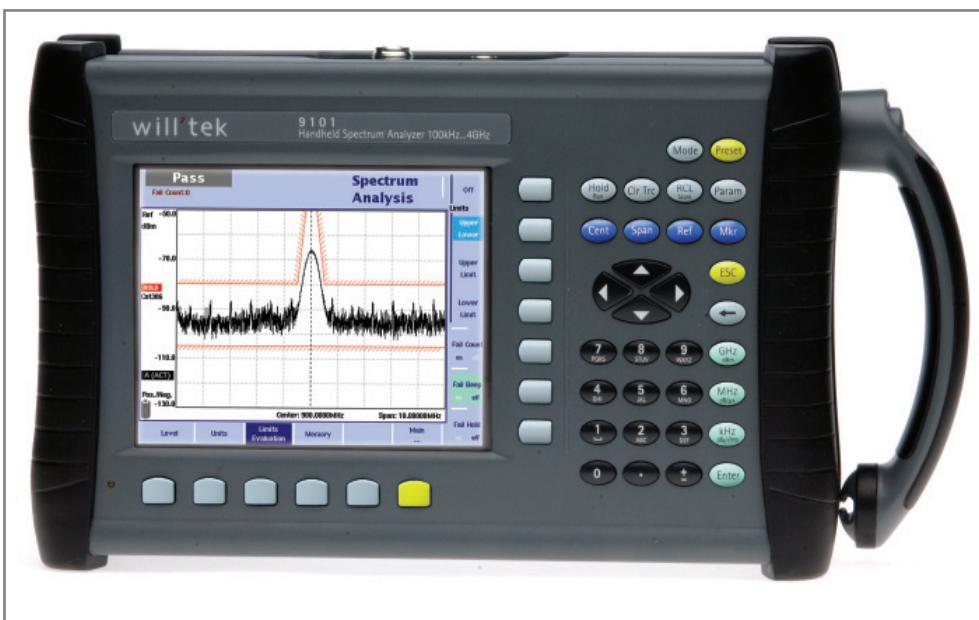

boosting wireless efficiency

Willtek 9101 Handheld Spectrum Analyzer

Covering all applications in a frequency range up to 4 GHz.
Ideal for mobile phone repair, basic testing in R&D labs, alignment testing for manufacturing, and measurement of base station emissions in the field

The 9101 Handheld Spectrum Analyzer provides RF engineers with the excellent performance of a workbench analyzer in a handheld form, at a competitive price.

One instrument for all your needs

- Used in mobile phone repair to detect and locate faulty mobile phone parts and components.
- Used in R&D labs to assess the electromagnetic radiation and to verify measures against EMI.
- Used in manufacturing to check and align the output of RF modules or units.
- Used in the field to measure and verify base station emissions.
- Used for installation troubleshooting, repair and maintenance e.g. in wireless local loop and modern 2.4 GHz Wi-Fi systems.

Typical measurements include transmitter testing, alignment of modulators and measuring switch breakthrough. The analyzer is fully controllable via front panel or by remote control from a PC. Measurement results and instrument settings can easily be transferred to a PC for presentation or post-processing. This rugged portable instrument is suitable for indoor and outdoor usage and with its excellent technical data and extensive feature set, meets many application needs.



Highlights

Covering all applications in a frequency range up to 4 GHz

Ideal for mobile phone repair, basic testing in R&D labs, alignment testing for manufacturing, and measurement of base station emissions in the field

Comprehensive feature set in one-button measurement

With its clear and easy-to-use operation, the 9101 Handheld Spectrum Analyzer presents all the measurement functions required to quickly and precisely resolve measurement tasks. The user-friendly interface with logical softkeys enhances operation.

Frequencies are increasing ... needn't break the budget

The wide frequency range from 100 kHz to 4 GHz enables testing in RF systems and modules such as modern wireless local oscillators.

This frequency coverage also captures the higher harmonics from amplifier or oscillator modules, plus any spurious signals that can mix and break through into the pass-band. Its complete coverage of carrier, IF stages and audio frequencies gives the performance needed when other analyzers run out of bandwidth.

Manual or automatic control made simple

Controlling the 9101 from a PC is easy and convenient with the built-in RS-232 interface and Ethernet port. All functions of the spectrum analyzer can be controlled via the industrial standard remote control SCPI command set.

Convenience

No time is wasted in setting up the instrument or copying settings from one instrument to the other by hand. The 9101 Data Exchange Software, which comes with the 9101, supports enhanced manage and transfer functions.

Channel systems, limit templates, settings and correction tables can easily be set up and maintained on a PC. The act of building new limit templates and correction tables is child's play, using the PC's mouse.

A live trace can be downloaded from the instrument at all times. An easy export to standard graphic formats such as BMP and JPG supports the need for quick documentation of measurement data. Likewise, stored traces can be uploaded to set the unit to the previous measurement settings.

9132 RMS Detector Option

The 9132 RMS Detector helps to get more out of digitally modulated signals. It adds high precision to the 9101's channel power measurements. Broadband and narrowband signals can be measured alike with superb accuracy, as the new detector is capable of analyzing signals that are similar to noise on the spectrum display. Such signals are smoothed and displayed with the precise RMS level.

Easy-to-read screens make all the difference in finding signals

The high-resolution colour VGA display (640 x 480 pixels) is great for finding misleading spurs or aligning modulators. Multiple colours facilitate the comparison of measurement traces on the screen. The extra bright 6.5" TFT display has a superb 140° viewing angle and provides fast updates.



Markers help in exactly reading signals

Up to four markers allow for exact reading of complex signals. The transmitter performance can be checked, spurious signals can be detected and sideband levels can be established using the four markers with their flexibility and clear on-screen display. By pressing Delta Marker second and third harmonic levels can easily be checked. Power level and frequency are displayed in relation to a reference point.

Pass/fail verdict with limit templates

Limit lines simplify assessment of complex displayed signals, give users the ability to decide whether the signal passes or fails. These limit templates can be set up with 30 segments.

At the same time it can be tested whether the signal exceeds an upper and/or lower limit.

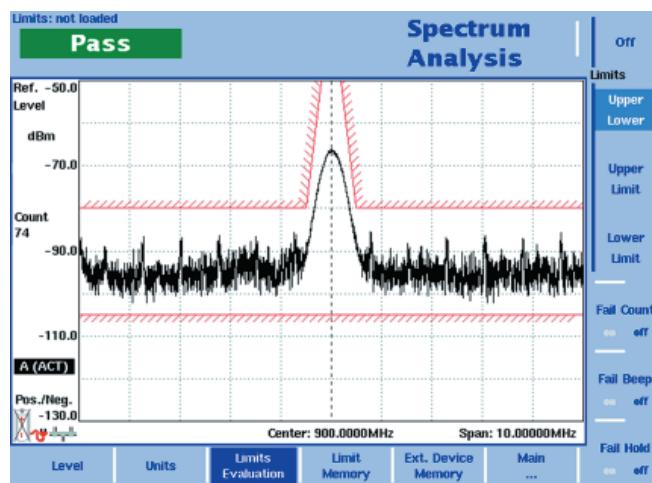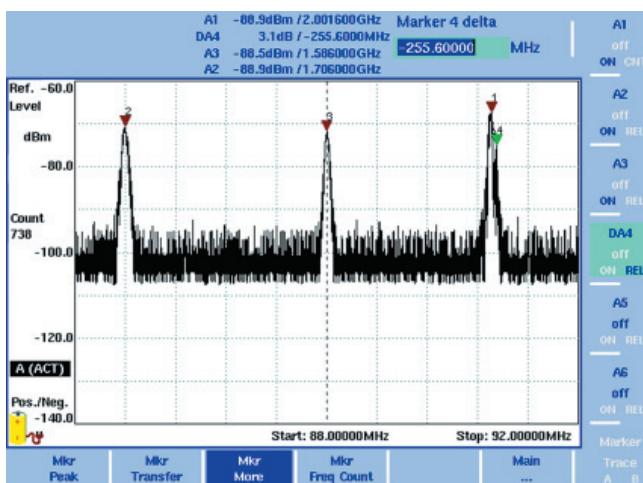

Get more out of digitally modulated signals through RMS channel power measurement functions

The RMS power measurement capability offers Channel Power, Adjacent Channel Power Ratio (ACPR) and the Occupied Bandwidth (OBW). ACPR enables measurements of the leakage power from a modulated communication channel into an adjacent channel.

The occupied bandwidth measurement represents the part of the transmitted power that lies in a specified bandwidth.

This measurement function can give useful qualitative information about the used bandwidth, e.g. give useful insight into transmitter operation.

This one-button functions allow rapid measurement and information about the behaviour of the specified communication channel. All significant values are displayed at a glance.

Additionally, the channel power measurement, ACPR and OBW are implemented into the "Spectrum Analyzer Mode". In contrast to the one-key operation an experienced user can set the measuring range, the resolution and the sweep time freely according to individual needs. This way, besides defined communication systems, measurements are easily set up when predefined communication systems cannot be used.

Accurate measurements in different RF environments

When making accurate amplitude measurements with a spectrum analyzer, it is required that any effects that alter the signal of interest between the device under test (DUT) and the analyzer be corrected while measuring. External devices like cables, amplifier, antenna and additional attenuator can influence the signal level. In the instrument software, the built-in amplitude correction is realised. The "External Device Compensation" function takes a list of frequency and amplitude pairs.

Connected linearly, these points offset the input signal accordingly. This correction table can be set up easily with the new "9100 Data Exchange Software".

Easy adjustment onto different impedance situations

Besides the 50 ohm world, the 75 ohm impedance is common in cable TV. The new instrument software now supports this standard too. When switching between impedances the suitable correction table will automatically loaded to assure correct measurement.

AM and FM demodulation

The presence of audio signals can be checked by demodulation of AM or FM signals using Zero Span mode and listening via the built-in loudspeaker.


Digital signal processing with reloadable digital IF

RF signals are digitally processed by microprocessor and field-programmable gate arrays (FPGA) to ensure both superb accuracy and repeatability as well as flexibility for future requirements.

Small and portable

With its minimal footprint, the 9101 is suitable for usage both on the bench and in the field. The low weight makes it a highly portable instrument in the lab and supports mobile applications in the field that seemed impossible before.

With the Willtek 1500 Battery Charger, additional battery modules can be recharged outside of the 9101. The batteries are easy to exchange, preparing the instrument for many hours of independent operation in the field.

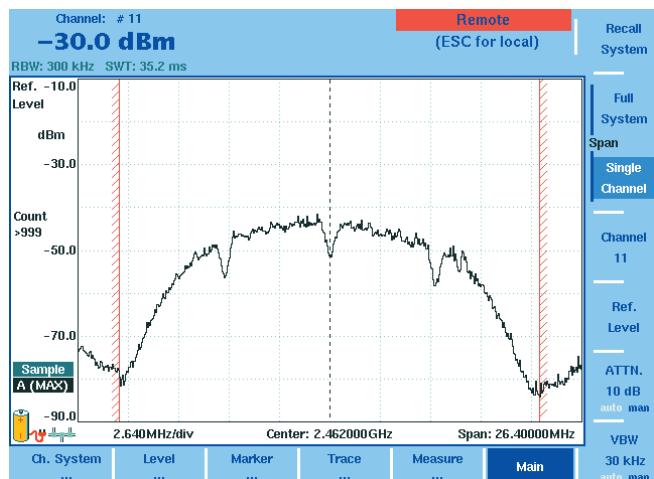

Specifications

Specifications valid for 9101B from serial number 5204001.

Specifications valid after 30 minutes warm-up time at ambient temperature, specified environmental conditions and typical measurement range, within a period of one year after calibration.

Frequency

Frequency range

Measurement range	100 kHz to 4 GHz
Resolution	1 kHz

Reference frequency

Temperature stability	±2 ppm
Aging	±1.5 ppm/year
Frequency uncertainty	±1.5 ppm

Frequency counter

Resolution	1 Hz, 10 Hz, 100 Hz
Min. required input level	-90 dBm

Frequency span

Setting range	0 Hz, 10 kHz to 4 GHz
Span > 100 kHz	1 ms to 250 s

Sweep time

Span > 100 kHz	1 ms to 250 s
Span = 0 Hz	1 ms to 250 s

Resolution bandwidth (RBW)

RBW selection	manual or automatic
RBW (-3 dB) range	100 Hz to 1 MHz
Steps	1, 3, 10

Video bandwidth (VBW)

VBW selection	manual or automatic
VBW range (-3 dB)	10 Hz to 1 MHz
Steps	1, 3, 10

SSB noise

(f = 2 GHz, Δf = 100 kHz, typ. < -83 dBc/Hz RBW = 10 kHz, VBW = 1 kHz)	
---	--

Amplitude

Maximum safe DC voltage at RF-in	±50 V
Maximum safe input power	30 dBm
Display units	dBm, dB μ V, dBmV, dBV, dB, V, mV, μ V, mW, μ W

Measurement range

in automatic mode	average noise floor to 20 dBm
-------------------	-------------------------------

Displayed average noise level (DANL)

(RBW = 100 Hz, attenuation = 0 dB)	
10 MHz to 1 GHz	< -127 dBm typ. -130 dBm
1 GHz to 4 GHz	< -130 dBm typ. -135 dBm

Input attenuation

User-defined by direct entry or step keys. 0 dB only selectable by direct entry to protect the first mixer.	
Setting range	(0) 10 to 50 dB
Attenuation steps	10 dB

Dynamic range

Range	> 70 dB
Max. measurable input level	20 dBm
(attenuation = 40 dB)	
Min. measurable input level	-130 dBm

Level accuracy

(Input attenuation = 10 dB, ambient temperature from +20°C to +26°C)	
10 MHz to 3.6 GHz	±1 dB

RF input match

(input attenuation = 10 dB, 10 MHz to 4 GHz)	
VSWR	< 1.6
typ. < 1.5	
Return loss	< -12 dB
typ. < -14 dB	

Reference level

Reference level setting by keyboard entry or step keys	
Setting range	-100 to +30 dBm
Resolution	0.1 dB

Spurious response

Image rejection (f = 1 GHz)	> 80 dB
Spurious level	< -90 dBm
(attenuation = 0 dB)	
LO breakthrough	< -77 dBm
(attenuation = 10 dB)	
Intermodulation-free range	> 63 dB
(input level -30 dBm, f ₁ = 990 MHz, f ₂ = 992 MHz)	

Functions

Detector & sweep

Detector types	pos./neg. peak, pos. peak, neg. peak, sample, RMS (optional)
Sweep processing	actual, average, max. hold, min. hold

Trace

Max. displayed traces	2
Trace points	2 x 501 ¹
Trace functions	A + B → A, A - B → A, copy a>b, copy b>a
Trace A	colour selectable (default is black)
Trace B	colour selectable (default is blue)

Marker

Max. markers	6
Delta markers	5
Marker functions	max. peak, next peak
Transfer functions	M → centre frequency M → ref. level M → f step

Limit check

Max. no. of limit templates	99
Limit functions	upper, lower, upper and lower
Max. no. of limit segments	30

Power measurement

Max. no. of channel systems	99
Measurement functions	Channel Power, ACPR, OBW
Default systems	GSM, WCDMA, DECT, WLAN

Demodulation

Min. input level	-50 dBm
AM/FM	on marker/permanent/on multi marker

Keyboard

Key type	silicon click
Parameters shortcut keys	Cent, Span, Ref
Quick setting keys	Preset, Hold/Run, Clr Trc, RCL/Store

¹ Two independent traces are available
(min. hold, max. hold at the same time)

General

Display (TFT)

Size	6.5"
Resolution	640 x 480
Colours	256
Brightness	300 cd
Measurement result points	2 x 501 ¹

Power supply

DC voltage, external	11 to 15 V / max. 28 W
Internal battery	Li-Ion
Operating time (battery fully charged, full brightness)	min. 2.1 h

Memory

Type	Flash disk
Capacity (set-ups and traces)	257

Dimensions

W x H x D	355 x 190 x 85 [mm]
-----------	---------------------

Weight

With battery	3.0 kg (6.6 lbs)
Power supply only	0.32 kg (0.7 lbs)

Environmental conditions

(unless otherwise specified)	MIL-PRF28800F class 2
Operating temperature	0 to +45°C
Storage temperature	-10 to +50°C
Rel. humidity (non-condensing)	80%

¹ Two independent traces are available
(min. hold, max. hold at the same time)

Connectors

RF in

Connector	type N (female)
Impedance	50 Ω

DC in


Connector	2.1 mm dia. barrel jack socket
Max. current	3 A

Serial interface

For software updates and remote control	
Connector	DB-9 (male)
Speed	57.6 kbit/s
Required cable	null modem cable

LAN (TCP/IP)

For software updates and remote control	
Connector	RJ-45
Speed	10 Mbit/s

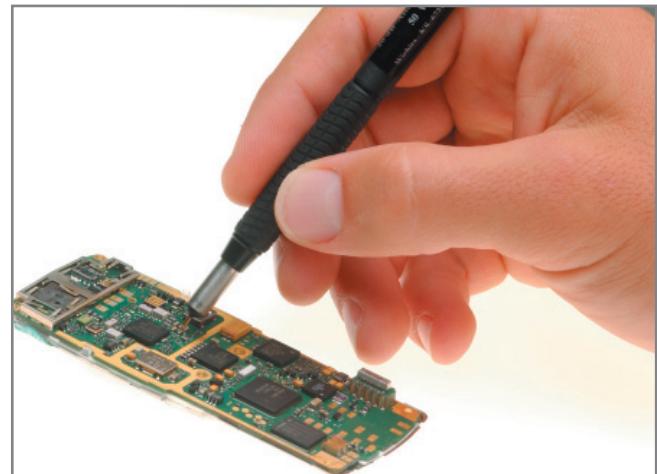

Standard delivery

Power supply (90 to 240 V, 50 to 60 Hz)

Getting started manual

User's guide on CD

9100 Data Exchange Software (1 license)

Cross-link Ethernet communication cable

Ordering information

Product Packages

9101 Handheld Spectrum Analyzer M 100 411

Bench Edition

9101 Handheld Spectrum Analyzer M 248 800

Field Edition

Options and accessories

9132 RMS Detector Option M 897 275

9100 Battery module, 7.2 Ah M 205 012

9100 Outdoor backpack M 241 015

9100 Soft carrying bag M 241 013

1500 Battery charger M 204 097

9100 Power supply M 248 328

9100 12 V car adapter M 860 389

9100 Safety lock M 867 037

9100 Data Exchange Software M 897 137

9100 Serial communication cable M 860 388

9100 Cross-link Ethernet communication cable M 880 629

1205 RF Probe 20 dB M 248 640

Frequency range 100 kHz to 4 GHz

RF attenuation (nominal at 50 Ω) 20 dB

including adapter N (male), BNC (female)

Antenna 900 MHz band (TNC) M 860 261

Antenna 1800 MHz band (TNC) M 860 262

Antenna 1880 MHz band (BNC) M 860 260

Antenna 2400 MHz band (TNC) M 860 146

Adapter N – TNC M 886 098

Adapter N – BNC M 886 097

Matching pad N 50 Ω to N 75 Ω M 886 205

Matching pad N 50 Ω to F 75 Ω M 886 204

Attenuator 18 GHz, 6 dB M 874 061

Related products

9102 Handheld Spectrum Analyzer M 100 412

Bench Edition

9102 Handheld Spectrum Analyzer M 248 806

Field Edition

9102 Handheld Spectrum Analyzer M 248 801

Tracking Edition





Willtek Communications GmbH
85737 Ismaning
Germany
Tel: +49 (0) 89 996 41-0
Fax: +49 (0) 89 996 41-440
info@willtek.com

Willtek Communications UK
Cheadle Hulme
United Kingdom
Tel: +44 (0) 161 486 3353
Fax: +44 (0) 161 486 3354
willtek.uk@willtek.com

Willtek Communications SARL
Roissy
France
Tel: +33 (0) 1 72 02 30 30
Fax: +33 (0) 1 49 38 01 06
willtek.fr@willtek.com

Willtek Communications Inc.
Parsippany
USA
Tel: +1 973 386 9696
Fax: +1 973 386 9191
willtek.cala@willtek.com
sales.us@willtek.com

Willtek Communications
Singapore
Asia Pacific
Tel: +65 943 63 766
willtek.ap@willtek.com

Willtek Communications Ltd.
Shanghai
China
Tel: +86 21 5835 8039
Fax: +86 21 5835 5238
willtek.cn@willtek.com

© Copyright 2006
Willtek Communications GmbH.
All rights reserved.
Willtek Communications, Willtek
and its logo are trademarks of
Willtek Communications GmbH.
All other trademarks and registered
trademarks are the property of their
respective owners.

Note: Specifications, terms and conditions are subject to change without prior notice.

will'tek