




SPECTRUM ANALYZER MS2661C 9 kHz to 3 GHz

For Analyzing Digital Radio Equipment and CATV Signals

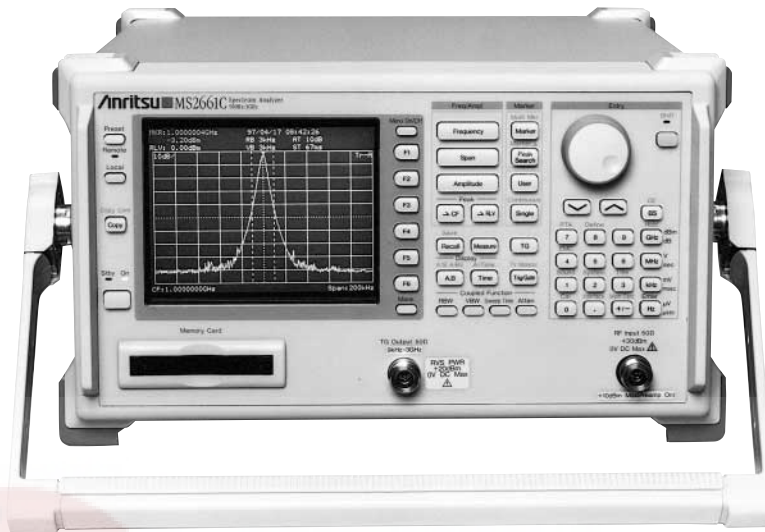

The MS2661C Portable Spectrum Analyzer is for signal analysis of radio and other equipment related to improving frequency usage efficiency, higher modulation, and digitalization. This is a synthesized spectrum analyzer covering a wide frequency range from 9 kHz to 3 GHz. It has superior basic performance such as high C/N ratio, low distortion, and high frequency/level accuracies and is easy to operate.

It has a "Measure" function for evaluation of radio equipment (frequency counter, C/N, adjacent channel power, occupied frequency bandwidth, burst average power, and template decision function), and which enables the two-screen display and FM demodulation waveform display. The large selection of options means that a wider range of applications can be handled at reasonable cost.

Specifications

Except where noted otherwise, specified values are obtained after warming up the equipment for 30 minutes at a constant ambient temperature and then performing calibration. The typical values are given for reference and are not guaranteed.

Frequency	Frequency range	9 kHz to 3 GHz
	Display frequency accuracy	\pm (display frequency \times reference frequency accuracy + span \times span accuracy + 100 Hz) *Span: ≥ 10 kHz, after calibration
	Marker frequency display accuracy	Normal: Same as display frequency accuracy; Delta: Same as frequency span accuracy
	Frequency counter	Resolution: 1 Hz, 10 Hz, 100 Hz, 1 kHz Accuracy: Display frequency \times reference frequency accuracy ± 1 LSD (at S/N: ≥ 20 dB)
	Frequency span	Setting range: 0 Hz, 1 kHz to 3.1 GHz Accuracy: $\pm 2.5\%$ (span: ≥ 10 kHz), $\pm 5\%$ (span: < 10 kHz, with option 02)
	Resolution bandwidth (RBW) (3 dB bandwidth)	Setting range: 1 kHz, 3 kHz, 10 kHz, 30 kHz, 100 kHz, 300 kHz, 1 MHz, 3 MHz (manually settable, or automatically settable according to frequency span) *Option 02: 30 Hz, 100 Hz, and 300 Hz are added. Measurements of noise, C/N, adjacent channel power and channel power by measure function are executed with the calculated equivalent noise bandwidth of the RBW. Bandwidth accuracy: $\pm 20\%$ (1 kHz to 1 MHz), $\pm 30\%$ (3 MHz) Selectivity (60 dB : 3 dB): $\leq 15:1$
	Video bandwidth (VBW)	1 Hz to 3 MHz (1-3 sequence), OFF (manually settable, or automatically settable according to RBW)
	Noise sideband, stability	Noise sideband: ≤ -100 dBc/Hz (1 GHz, 10 kHz offset) Residual FM: ≤ 20 Hzp-p/0.1 s (1 GHz, span: 0 Hz) Frequency drift: ≤ 200 Hz/min (span: ≤ 10 kHz, sweep time: ≤ 100 s) *After 1-hour warm-up at constant ambient temperature
Amplitude	Reference oscillator	Frequency: 10 MHz Aging rate: 2×10^{-6} /year (typical); Option 01: 1×10^{-7} /year, 2×10^{-8} /day Temperature characteristics: 1×10^{-5} (typical, 0° to 50°C); Option 01: $\pm 5 \times 10^{-8}$ (0° to 50°C) *Referenced to frequency at 25°C
	Level measurement	Measurement range: Average noise level to +30 dBm Maximum input level: +30 dBm (CW average power, RF ATT: ≥ 10 dB), ± 50 Vdc Average noise level: ≤ -115 dBm (1 MHz to 1 GHz), ≤ -115 dBm + f [GHz] dB (> 1 GHz), ≤ -114 dBm (1 MHz to 1 GHz, at Option 08 pre-amplifier installed), ≤ -114 dBm + 1.5f [GHz] dB (> 1 GHz, at Option 08 pre-amplifier installed) *RBW: 1 kHz, VBW: 1 Hz, RF ATT: 0 dB Residual response: ≤ -100 dBm (RF ATT: 0 dB, input: 50Ω termination, 1 MHz to 3 GHz)
	Total level accuracy	± 1.3 dB (100 kHz to 3 GHz) *Level measurement accuracy after calibration using internal calibration signal Total level accuracy: Reference level accuracy (0 to -49.9 dBm) + frequency response + log linearity (0 to -20 dB) + calibration signal source accuracy

Continued on next page

Amplitude	Reference level	<p>Setting range Log scale: -100 to +30 dBm; Linear scale: 224 μV to 7.07 V Unit Log scale: dBm, dBμV, dBmV, V, dBμVemf, W, dBμV/m Linear scale: V Reference level accuracy: ± 0.4 dB (-49.9 to 0 dBm), ± 0.75 dB (-69.9 to -50 dBm, 0.1 to +30 dBm), ± 1.5 dB (-80 to -70 dBm) *After calibration, at 100 MHz, span: 1 MHz (when RF ATT, RBW, VBW, and sweep time set to AUTO) RBW switching uncertainty: ± 0.3 dB (1 kHz to 1 MHz), ± 0.4 dB (3 MHz) *After calibration, referenced to RBW: 3 kHz Input attenuator (RF ATT) Setting range: 0 to 70 dB (10 dB steps) *Manually settable, or automatically settable according to reference level Switching uncertainty: ± 0.3 dB (0 to 50 dB), ± 1.0 dB (0 to 70 dB) *After calibration, frequency: 100 MHz, referenced to RF ATT: 10 dB</p>
	Frequency response	<p>± 0.5 dB (100 kHz to 3 GHz, referenced to 100 MHz, RF ATT: 10 dB, 18° to 28°C) ± 1.5 dB (9 to 100 kHz, referenced to 100 MHz, RF ATT: 10 dB, 18° to 28°C) ± 1.0 dB (100 kHz to 3 GHz, referenced to 100 MHz, RF ATT: 10 to 50 dB)</p>
	Waveform display	<p>Scale (10 div) Log scale: 10, 5, 2, 1 dB/div Linear scale: 10, 5, 2, 1%/div Linearity (after calibration) Log scale: ± 0.4 dB (0 to -20 dB), ± 1.0 dB (0 to -70 dB), ± 1.5 dB (0 to -85 dB), ± 2.5 dB (0 to -90 dB) Linear scale: $\pm 4\%$ (compared to reference level) Marker level resolution Log scale: 0.01 dB; Linear scale: 0.02% of reference level</p>
	Spurious response	<p>2nd harmonic distortion: ≤ -60 dBc (10 to 200 MHz), ≤ -75 dBc (0.2 to 1.5 GHz), ≤ -80 dBc (0.8 to 1 GHz) *Mixer input: -30 dBm Two signals 3rd order intermodulation distortion: ≤ -70 dBc (10 to 100 MHz), ≤ -80 dBc (0.1 to 3 GHz) *Frequency difference of two signals: ≥ 50 kHz, mixer input: -30 dBm</p>
	1 dB gain compression	≥ -5 dBm (≥ 100 MHz, at mixer input level)
Maximum dynamic range	<p>1 dB gain compression level to average noise level: > 110 dB (0.1 to 1 GHz), > 110 dB - f [GHz] dB (> 1 GHz), > 109 dB (0.1 to 1 GHz, at Option 08 pre-amplifier installed), > 109 dB - 1.5f [GHz] (> 1 GHz, at Option 08 pre-amplifier installed)</p>	
	<p>Distortion characteristics (RBW: 1 kHz) 2nd harmonic: > 72.5 dB (10 to 200 MHz), > 80 dB (200 to 500 MHz), $> 80 - f$ [GHz] dB (0.5 to 1.5 GHz), $> 82.5 - f$ [GHz] dB (0.8 to 1 GHz) 3rd order intermodulation: > 80 dB (10 to 100 MHz), > 83.3 dB (0.1 to 1 GHz), $> 83.3 - (2/3)f$ [GHz] dB (1 to 3 GHz)</p>	
Sweep	Sweep time	<p>Setting range : 20 ms to 1000 s (Manually settable, or automatically settable according to span, RBW and VBW) Accuracy: $\pm 15\%$ (20 ms to 100 s), $\pm 45\%$ (110 to 1000 s), $\pm 1\%$ (time domain sweep: digital zero span mode)</p>
	Sweep mode	Continuous, single
	Time domain sweep mode	Analog zero span, digital zero span
	Zone sweep	Sweeps only in frequency range indicated by zone marker
	Tracking sweep	Sweeps while tracing peak points within zone marker (zone sweep also possible)
Functions	Number of data points	501
	Detection mode	<p>NORMAL: Simultaneously displays max. and min. points between sample points POS PEAK: Displays max. point between sample points NEG PEAK: Displays min. point between sample points SAMPLE: Displays momentary value at sample points Detection mode switching uncertainty: ± 0.5 dB (at reference level)</p>
	Display	Color TFT-LCD, Size: 5.5 inch, Number of colors: 17 (RGB, each 64-scale settable); Intensity adjustment: 5 steps settable
	Display functions	<p>Trace A: Displays frequency spectrum Trace B: Displays frequency spectrum Trace Time: Displays time domain waveform at center frequency Trace A/B: Displays Trace A and Trace B simultaneously. Simultaneous sweep of same frequency, alternate sweep of independent frequencies Trace A/BG: Displays frequency region to be observed (background) and object band (foreground) selected from background with zone marker simultaneously at alternate sweep Trace A/Time: Displays frequency spectrum, and time domain waveform at center frequency simultaneously at alternate sweep Trace move/calculation: A \rightarrow B, B \rightarrow A, A \leftrightarrow B, A + B \rightarrow A, A - B \rightarrow A, A - B + DL \rightarrow A</p>
	Storage functions	NORMAL, VIEW, MAX HOLD, MIN HOLD, AVERAGE, CUMULATIVE, OVER WRITE
	FM demodulation waveform display function	<p>Demodulation range: 2, 5, 10, 20, 50, 100, 200 kHz/div Marker display accuracy: $\pm 5\%$ of full scale (referenced to center frequency, DC-coupled, RBW: 3 MHz, VBW: 1 Hz, CW) Demodulation frequency response: DC (50 Hz at AC-coupled) to 100 kHz *Range: ≤ 20 kHz/div, VBW: off, at 3 dB bandwidth DC (50 Hz at AC-coupled) to 500 kHz *Range: ≥ 50 kHz/div, VBW: off, at 3 dB bandwidth *RBW: ≥ 1 kHz usable</p>
	Input connector	N-J, 50 Ω
	Auxiliary signal input and output	<p>IF OUTPUT: 10.69 MHz, BNC connector VIDEO OUTPUT (Y): 0 to 0.5 V ± 0.1 V (100 MHz, from lower edge to upper edge at 10 dB/div or 10%/div, 75 Ω terminated, BNC connector) COMPOSITE OUTPUT: For NTSC, 1 Vp-p (75 Ω terminated), BNC connector EXT REF INPUT: 10 MHz ± 10 Hz, ≥ 0 dBm (50 Ω terminated), BNC connector</p>
	Signal search	AUTO TUNE, PEAK \rightarrow CF, PEAK \rightarrow REF, SCROLL
	Zone marker	NORMAL, DELTA
	Marker \rightarrow	MARKER \rightarrow CF, MARKER \rightarrow REF, MARKER \rightarrow CF STEP SIZE, Δ MARKER \rightarrow SPAN, ZONE \rightarrow SPAN
Peak search	PEAK, NEXT PEAK, NEXT RIGHT PEAK, NEXT LEFT PEAK, MIN DIP, NEXT DIP	

Continued on next page

Functions	Multimarker	Number of markers: 10 max. (HIGHEST 10, HARMONICS, MANUAL SET)
	Measure	Noise power (dBm/Hz, dBm/ch), C/N (dBc/Hz, dBc/ch), occupied bandwidth (power N% method, X-dB down method), adjacent channel power (REF: total power/reference level/in-band level method, channel designate display: 2 channels x 2 graphic display), average power of burst signal (average power in designated time range of time domain waveform), channel power (dBm, dBm/Hz), template comparison (upper/lower limits x each 2, time domain), MASK (upper/lower x each 2, frequency domain)
	Save/recall	Saves and recalls setting conditions and waveform data to internal memory (max. 12) or memory card
	Hard copy	Printer (HP dotmatrix, EPSON dotmatrix or compatible models): Display data can be hard-copied via RS-232C, GPIB, and Centronics (Option 10) interface Plotter (HP-GL, GP-GL compatible models): Display can be output via RS-232C and GPIB interface
	PTA	Language: PTL (interpreter based on BASIC) Programming: Using editor of external computer Program memory: Memory card, upload/download to/from external computer Programming capacity: 192 KB Data processing: Directly accesses measurement data according to system variables, system subroutines, and system functions
	RS-232C	Outputs data to printer and plotter. Control from external computer (excluding power switch)
	GPIB	Meets IEEE488.2. Controlled by external computer (excluding power switch). Or controls external equipment with PTA Interface function : SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT1, C1, C2, C3, C4, C28
	Correction	Automatic correction of insertion loss of MA1621A Impedance Transformer Correction accuracy (RF ATT: ≥ 10 dB): ± 2.5 dB (9 to 100 kHz), ± 1.5 dB (100 kHz to 2 GHz), ± 2.0 dB (2 to 3 GHz) *Typical value Antenna correction coefficients: Correct display and measurement of field strengths (dB μ V/m) for specified antennas. Internal antenna correction coefficients (MP534A/651A Dipole Antenna, MP635A/666A Log-Periodic Antenna, MP414B Loop Antenna, and four antennas user-defined; writes via GPIB or RS-232C interface, saves/loads to/from memory card)
	Memory card interface	Functions: Saving/recalling measurement parameters/waveform data, uploading/downloading PTA programs; Applicable cards: SRAM, EPROM, Flash EPROM *Only SRAM writable; Card capacity: 2 MB max. The SRAM card is supported by Windows95/98 [®] of OS. Connector: Meets the PCMCIA Rel. 2.0, 2 slots
Others	EMC	EN61326: 1997/A1: 1998 (Class A) EN61000-3-2: 1995/A2: 1998 (Class A) EN61326: 1997/A1: 1998 (Annex A)
	LVD	EN61010-1: 1993/A2: 1995 (Installation Category II, Pollution degree 2)
	Vibration	Meets the MIL-STD-810D
	Power (operating range)	85 to 132/170 to 250 Vac (automatic voltage switching), 47.5 to 63 Hz, 380 to 420 Hz (85 to 132 V only), ≤ 330 VA
	Dimensions and mass	320 (W) x 177 (H) x 351 (D) mm, ≤ 10.8 kg (without option)
	Ambient temperature	0° to +50°C (operate), -40° to +75°C (storage)

• Option 01: Reference crystal oscillator

Frequency	10 MHz
Aging rate	$\leq 1 \times 10^{-7}$ /year, $\leq 2 \times 10^{-8}$ /day (after power on, with reference to frequency after 24 h)
Temperature characteristics	$\pm 5 \times 10^{-8}$ (0° to 50°C, with reference to 25°C)
Buffer output	BNC connector, 10 MHz, > 2 Vp-p (200 Ω terminated)

• Option 02: Narrow resolution bandwidth

Resolution bandwidth (3 dB)	30 Hz, 100 Hz, 300 Hz
Resolution bandwidth switching uncertainty	± 0.4 dB (RBW 3 kHz referenced)
Resolution bandwidth accuracy	$\pm 20\%$ (100, 300 Hz)
Selectivity (60 dB:3 dB)	$\leq 15:1$ (RBW: 100, 300 Hz), $\leq 20:1$ (RBW: 30 Hz)

• Option 04: High-speed time domain sweep

Sweep time	12.5 μ s, 25 μ s, 50 μ s, 100 to 900 μ s (one most significant digit settable) 1.0 to 19 ms (two upper significant digits settable)
Accuracy	$\pm 1\%$
Marker level resolution	0.1 dB (log scale), 0.2% (linear scale, relative to reference level)

• Option 06: Trigger/gate circuit

Trigger switch	FREERUN, TRIGGERED	
Trigger source	EXT	Trigger level: ± 10 V (resolution: 0.1 V), TTL level Trigger slope: Rise/Fall Connector: BNC
	VIDEO	Trigger level (at log scale): -100 to 0 dB (resolution: 1 dB) Trigger slope: Rise/Fall
	WIDE IF VIDEO	Trigger level: High, middle, or low selectable Bandwidth: ≥ 20 MHz Trigger slope: Rise/Fall
	LINE	Frequency: 47.5 to 63 Hz (line lock)
TV	Method: M-NTSC, B/G/H PAL Sync: V-SYNC, H-SYNC Sync line (NTSC) H-SYNC (ODD): 7 to 262 line, H-SYNC (EVEN): 1 to 263 line Sync line (PAL) H-SYNC (ODD): 1 to 312 line, H-SYNC (EVEN): 317 to 625 line *Option 16 required	
	Trigger delay	Pre-trigger (displays waveform from previous max. 1 screen at trigger occurrence point) Range: -time span to 0 s Resolution: time span/500 Post trigger (displays waveform from after max. 65.5 ms at trigger occurrence point) Range: 0 to 65.5 ms Resolution: 1 μ s
Gate sweep	In frequency domain, displays spectrum of input signal in specified gate interval Gate delay: 0 to 65.5 ms (from trigger point, resolution: 1 μ s) Gate width: 2 μ s to 65.5 ms (from gate delay, resolution: 1 μ s)	

• Option 07: AM/FM demodulator

Voice output	With internal loudspeaker and earphone connector (ø3.5 jack), adjustable volume
--------------	---

• Option 10: Centronics interface

Function	Outputs data to printer (Centronics standard). GPIB interface cannot be installed simultaneously.
Connector	D-sub 25-pin (jack)

• Option 08: Pre-amplifier*1

Frequency range	100 kHz to 3 GHz, 100 kHz to 2.5 GHz (with Option 22)	
Noise figure	≤7 dB (typical, <2 GHz), ≤12 dB (typical, ≥2 GHz), ≤9 dB (typical, <2 GHz, with Option 22), ≤14 dB (typical, ≥2 GHz, with Option 22)	
Amplitude	Measurement range	Average noise level to +10 dBm
	Max. input level	CW average power: +10 dBm, ±50 Vdc
	Average noise level	≤-134 dBm (1 MHz to 1 GHz), ≤-134 dBm + 2f [GHz] dB (>1 GHz), ≤-132 dBm (1 MHz to 1 GHz, with Option 22), ≤-132 dBm + 2f [GHz] dB (≥1 GHz, with Option 22) *RBW: 1 kHz, VBW: 1 Hz, RF ATT: 0 dB
	Reference level	Setting range Log scale: -120 to +10 dBm, or equivalent level Linear scale: 22.4 μV to 707 mV, 27.4 μV to 487 mV with Option 22 Reference level accuracy: ±0.5 dB (-69.9 to -20 dBm), ±0.75 dB (-89.9 to -70 dBm, -19.9 to +10 dBm) *After calibration, referenced to 100 MHz, 1 MHz span (RF ATT, RBW, VBW and sweep time set to AUTO) RBW switching uncertainty: ±0.5 dB *After calibration, referenced to 3 kHz RBW RF ATT switching uncertainty: ±0.5 dB (0 to 50 dB), ±1.0 dB (0 to 70 dB) *After calibration, referenced to 100 MHz, RF ATT: 10 dB
	Frequency response	±2.0 dB (100 kHz to 3 GHz, referenced to 100 MHz, RF ATT: 10 to 50 dB) ±2.0 dB (with Option 22, 100 kHz to 2.5 GHz, referenced to 100 MHz, RF ATT: 10 dB, 18° to 28°C)
	Linearity of waveform display	Log scale (after calibration): ±0.5 dB (0 to -20 dB), ±1.0 dB (0 to -60 dB), ±1.5 dB (0 to -75 dB) Linear scale (after calibration): ±5% (according to reference level)
	Spurious response	Two signals 3rd order intermodulation distortion: ≤-70 dBc (10 MHz to 3 GHz, 10 MHz to 2.5 GHz with Option 22) *Frequency difference of two signals: ≥50 kHz, Pre-amplifier input*2: -55 dBm
	1 dB gain compression	≥-35 dBm (≥100 MHz, at pre-amplifier input level*2)

*1: Overall specification with pre-amplifier on (Noise figure is the simple performance)

*2: Pre-amplifier input level = RF input level - RF ATT setting level

• Option 12: QP detector

Functions	QP detection *Requires Option 02.																																											
6 dB bandwidth	200 Hz, 9 kHz, 120 kHz Accuracy: ±30% (18° to 28°C)																																											
Display	LOG scale, 5 dB/div (10 divisions) Linearity: ≤±2.0 dB (0 to -40 dB, CW signal, reference level: 60 dBμV, RF ATT: 0 dB, 18° to 28°C)																																											
Pulse response characteristics	Response to CISPR pulse (DET mode: QP, 18° to 28°C)																																											
	<table border="1"> <thead> <tr> <th rowspan="2">Repetition frequency</th> <th colspan="3">Bandwidth</th> </tr> <tr> <th>120 kHz</th> <th>9 kHz</th> <th>200 Hz</th> </tr> </thead> <tbody> <tr> <td>1 kHz</td> <td>≤-8.0 ±1.0 dB</td> <td>≤-4.5 ±1.0 dB</td> <td>-</td> </tr> <tr> <td>100 Hz</td> <td>Referenced</td> <td>Referenced</td> <td>≤-4.0 ±1.0 dB</td> </tr> <tr> <td>60 Hz</td> <td>-</td> <td>-</td> <td>≤-3.0 ±1.0 dB</td> </tr> <tr> <td>25 Hz</td> <td>-</td> <td>-</td> <td>Referenced</td> </tr> <tr> <td>20 Hz</td> <td>≤+9.0 ±1.0 dB</td> <td>≤+6.5 ±1.0 dB</td> <td>-</td> </tr> <tr> <td>10 Hz</td> <td>≤+14.0 ±1.5 dB</td> <td>≤+10.0 ±1.5 dB</td> <td>≤+4.0 ±1.0 dB</td> </tr> <tr> <td>5 Hz</td> <td>-</td> <td>-</td> <td>≤+7.5 ±1.5 dB</td> </tr> <tr> <td>2 Hz</td> <td>≤+26.0 ±2.0 dB</td> <td>≤+20.5 ±2.0 dB</td> <td>≤+13.0 ±2.0 dB</td> </tr> <tr> <td>1 Hz</td> <td>≤+28.5 ±2.0 dB</td> <td>≤+22.5 ±2.0 dB</td> <td>≤+17.0 ±2.0 dB</td> </tr> </tbody> </table>	Repetition frequency	Bandwidth			120 kHz	9 kHz	200 Hz	1 kHz	≤-8.0 ±1.0 dB	≤-4.5 ±1.0 dB	-	100 Hz	Referenced	Referenced	≤-4.0 ±1.0 dB	60 Hz	-	-	≤-3.0 ±1.0 dB	25 Hz	-	-	Referenced	20 Hz	≤+9.0 ±1.0 dB	≤+6.5 ±1.0 dB	-	10 Hz	≤+14.0 ±1.5 dB	≤+10.0 ±1.5 dB	≤+4.0 ±1.0 dB	5 Hz	-	-	≤+7.5 ±1.5 dB	2 Hz	≤+26.0 ±2.0 dB	≤+20.5 ±2.0 dB	≤+13.0 ±2.0 dB	1 Hz	≤+28.5 ±2.0 dB	≤+22.5 ±2.0 dB	≤+17.0 ±2.0 dB
	Repetition frequency		Bandwidth																																									
		120 kHz	9 kHz	200 Hz																																								
	1 kHz	≤-8.0 ±1.0 dB	≤-4.5 ±1.0 dB	-																																								
	100 Hz	Referenced	Referenced	≤-4.0 ±1.0 dB																																								
	60 Hz	-	-	≤-3.0 ±1.0 dB																																								
	25 Hz	-	-	Referenced																																								
	20 Hz	≤+9.0 ±1.0 dB	≤+6.5 ±1.0 dB	-																																								
	10 Hz	≤+14.0 ±1.5 dB	≤+10.0 ±1.5 dB	≤+4.0 ±1.0 dB																																								
5 Hz	-	-	≤+7.5 ±1.5 dB																																									
2 Hz	≤+26.0 ±2.0 dB	≤+20.5 ±2.0 dB	≤+13.0 ±2.0 dB																																									
1 Hz	≤+28.5 ±2.0 dB	≤+22.5 ±2.0 dB	≤+17.0 ±2.0 dB																																									
QP on/off switching uncertainty (PEAK, QP)	≤±1.0 dB (CW signal, reference level - 40 dB, after auto-calibration, 18° to 28°C)																																											
Detection mode	QP, AVERAGE																																											
Field strength measurement	Waveform data compensation data display for specified antenna factor, field strength (dBμV/m) Built-in antenna factors: MP534A/651A Dipole Antenna, MP635A/666A Log-Periodic Antenna, MP414B Loop Antenna, user-defined (four types writable via GPIB or RS-232C, can be saved/loaded to/from memory card)																																											

• Option 14: PTA parallel I/O

Functions	Controls external devices from PTA, cannot be installed when Option 10 installed																																																																															
System variables	As follows using PTA system variables IOA: Controls 8-bit parallel output port A IOB: Controls 8-bit parallel output port B IOC: Controls 4-bit parallel input/output port C	IOD: Controls 4-bit parallel input/output port D EIO: Controls I/O switching of ports C/D EXO: Controls I/O trigger																																																																														
PTL statements	External interrupt control of input to I/O ports using PTA-PTL statements IOEN statement: Enables interrupt input ON TO GOTO statement: Changes program flow at interrupt generation IODI statement: Disables interrupt input ON TO GOSUB statement: Changes program flow at interrupt generation IOMA statement: Masks interrupt input																																																																															
Write strobe signal	Write strobe signal (negative pulse) output externally at control of output ports C/D																																																																															
Power supply	External +5 ±0.5 Vdc (max. 100 mA) supply																																																																															
Signal logic levels	Negative logic, TTL level Specified current: Output ports A/B (max. output current Hi: 2.6 mA, Lo: 24 mA) Output ports C/D (max. output current Hi: 15 mA, Lo: 24 mA) Other control output lines (max. output current Hi: 0.4 mA, Lo: 8 mA)																																																																															
Connection cable connectors	Amphenol 36 pins																																																																															
Connector pin layout	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>No.</th> <th>Item</th> <th>No.</th> <th>Item</th> <th>No.</th> <th>Item</th> </tr> </thead> <tbody> <tr><td>1</td><td>GND</td><td>13</td><td>Output port B (0) LSB</td><td>25</td><td>I/O port D (0) LSB</td></tr> <tr><td>2</td><td>Trigger input</td><td>14</td><td>Output port B (1)</td><td>26</td><td>I/O port D (1)</td></tr> <tr><td>3</td><td>Trigger output 1</td><td>15</td><td>Output port B (2)</td><td>27</td><td>I/O port D (2)</td></tr> <tr><td>4</td><td>Trigger output 2</td><td>16</td><td>Output port B (3)</td><td>28</td><td>I/O port D (3) MSB</td></tr> <tr><td>5</td><td>Output port A (0) LSB</td><td>17</td><td>Output port B (4)</td><td>29</td><td>Port C status 0/1: I/O</td></tr> <tr><td>6</td><td>Output port A (1)</td><td>18</td><td>Output port B (5)</td><td>30</td><td>Port D status 0/1: I/O</td></tr> <tr><td>7</td><td>Output port A (2)</td><td>19</td><td>Output port B (6)</td><td>31</td><td>Write strobe signal</td></tr> <tr><td>8</td><td>Output port A (3)</td><td>20</td><td>Output port B (7) MSB</td><td>32</td><td>Interruption signal</td></tr> <tr><td>9</td><td>Output port A (4)</td><td>21</td><td>I/O port C (0) LSB</td><td>33</td><td>Not used</td></tr> <tr><td>10</td><td>Output port A (5)</td><td>22</td><td>I/O port C (1)</td><td>34</td><td>+5 V power supply</td></tr> <tr><td>11</td><td>Output port A (6)</td><td>23</td><td>I/O port C (2)</td><td>35</td><td>Not used</td></tr> <tr><td>12</td><td>Output port A (7) MSB</td><td>24</td><td>I/O port C (3) MSB</td><td>36</td><td>Not used</td></tr> </tbody> </table>		No.	Item	No.	Item	No.	Item	1	GND	13	Output port B (0) LSB	25	I/O port D (0) LSB	2	Trigger input	14	Output port B (1)	26	I/O port D (1)	3	Trigger output 1	15	Output port B (2)	27	I/O port D (2)	4	Trigger output 2	16	Output port B (3)	28	I/O port D (3) MSB	5	Output port A (0) LSB	17	Output port B (4)	29	Port C status 0/1: I/O	6	Output port A (1)	18	Output port B (5)	30	Port D status 0/1: I/O	7	Output port A (2)	19	Output port B (6)	31	Write strobe signal	8	Output port A (3)	20	Output port B (7) MSB	32	Interruption signal	9	Output port A (4)	21	I/O port C (0) LSB	33	Not used	10	Output port A (5)	22	I/O port C (1)	34	+5 V power supply	11	Output port A (6)	23	I/O port C (2)	35	Not used	12	Output port A (7) MSB	24	I/O port C (3) MSB	36	Not used
No.	Item	No.	Item	No.	Item																																																																											
1	GND	13	Output port B (0) LSB	25	I/O port D (0) LSB																																																																											
2	Trigger input	14	Output port B (1)	26	I/O port D (1)																																																																											
3	Trigger output 1	15	Output port B (2)	27	I/O port D (2)																																																																											
4	Trigger output 2	16	Output port B (3)	28	I/O port D (3) MSB																																																																											
5	Output port A (0) LSB	17	Output port B (4)	29	Port C status 0/1: I/O																																																																											
6	Output port A (1)	18	Output port B (5)	30	Port D status 0/1: I/O																																																																											
7	Output port A (2)	19	Output port B (6)	31	Write strobe signal																																																																											
8	Output port A (3)	20	Output port B (7) MSB	32	Interruption signal																																																																											
9	Output port A (4)	21	I/O port C (0) LSB	33	Not used																																																																											
10	Output port A (5)	22	I/O port C (1)	34	+5 V power supply																																																																											
11	Output port A (6)	23	I/O port C (2)	35	Not used																																																																											
12	Output port A (7) MSB	24	I/O port C (3) MSB	36	Not used																																																																											

• Option 15: Sweep signal output

Sweep output (X)	0 to 10 V ±1 V (≥100 kΩ termination, from left side to right side of display scale), BNC connector
Sweep status output (Z)	TTL level (low level with sweeping), BNC connector

• Option 19: DC coupled input

Functions	DC-couples input circuit of main unit and expands lower limit of receiver frequency range to 500 Hz *Can only be installed with narrow RBW (Option 02)
Electrical characteristics	The standard specifications of the main unit are supplemented and changed as follows: Frequency range: 500 Hz to 3.0 GHz Max. input level: +30 dBm (CW, RF ATT: ≥10 dB), ±0 Vdc Average noise level: <-80 dBm (500 Hz to 10 kHz), ≤-90 dBm (10 kHz to 200 kHz), ≤-110 dBm (200 kHz to 1 MHz) *RBW: 30 Hz, VBW: 1 Hz, RF ATT: 0 dB Frequency response: ±1.2 dB (500 Hz to 100 kHz), ±0.5 dB (100 kHz to 3 GHz) *Referenced to 100 MHz frequency, RF ATT: 10 dB, 18° to 28°C

• Option 20: Tracking generator

Frequency range	9 kHz to 3 GHz
Output level range	0 to -60 dBm
Setting resolution	0.1 dB
Output level accuracy	±1.0 dB (at 100 MHz, 0 dBm)
Output level flatness	±1.5 dB (100 kHz to 3 GHz, output level: 0 dBm, referenced to 100 MHz frequency)
Output level linearity	±1.0 dB (0 to -30 dBm), ±2.0 (-30 to -60 dBm) *100 kHz to 3 GHz, 0 dBm output level reference
Spurious	Harmonic: ≤-20 dBc (100 kHz to 3 GHz), Non-harmonic: ≤-35 dBc (100 kHz to 3 GHz)
Tracking generator feed through	≤-95 dBm (spectrum analyzer input and tracking generator output connectors terminated at 50 Ω)
Output connector	N-J, 50 Ω

• Option 21: Television monitor (Multi)

Video	M-NTSC, B/G/H/I/D PAL, color
Audio	Simultaneous monitoring of video and audio *Needs Option 07
Function	Channel: Automatic setting to broadcast wave of CCIR, Japan, USA, Italy, UK and China; automatic setting to CATV of CCIR, Japan and USA Trigger: Triggered sweep by V-SYNC, H-SYNC *Needs trigger/gate circuit (Option 06) Aux. output: Composite video signal; Connector: BNC

• **Option 22: 75 Ω input (Option 12, 19, and 20 cannot be installed simultaneously)**

Frequency range		100 kHz to 2.5 GHz
Amplitude	Level measurement	Measurement range: Average noise level to +25 dBm (+133.8 dBμV) Max. input level: +25 dBm (+133.8 dBμV, CW average power, RF ATT: ≥10 dB), ±100 Vdc Residual response: ≤−95 dBm (+13.8 dBμV, RF ATT: 0 dB, input: 75 Ω terminated, 1 MHz to 2.5 GHz)
	Total level accuracy	±1.8 dB (100 kHz to 2.5 GHz, level measurement accuracy after calibration using internal calibration signal) Total level accuracy: Reference level accuracy (0 to −49.9 dBm) + frequency response + log linearity (0 to −20 dBm) + calibration signal source accuracy
	Reference level	Setting range Log scale: +8.8 to +133.8 dBμV, Linear scale: 274 μV to 4.87 V
	Frequency response	±1.0 dB (100 kHz to 2.5 GHz, referenced to 100 MHz, RF ATT: 10 dB, 18° to 28°C)
	Waveform display	Linearity (after calibration) Log scale: ±0.4 dB (0 to −20 dB), ±1.0 dB (0 to −70 dB), ±1.5 dB (0 to −85 dB) Linear scale: ±4% (according to reference level) Marker level resolution Log scale: 0.01 dB Linear scale: 0.02% (according to reference level)
	Spurious response	2nd harmonic distortion: ≤−60 dBc (10 to 200 MHz, mixer input: −30 dBm), ≤−75 dBc (0.2 to 1.25 GHz, band 0, mixer input: −30 dBm), ≤−80 dBc (0.8 to 1 GHz, mixer input: −30 dBm) Two signals 3rd order intermodulation distortion: ≤−70 dBc (10 to 100 MHz), ≤−80 dBc (0.1 to 2.5 GHz) *Frequency difference of two signals: ≥50 kHz, mixer input: −30 dBm
Max. dynamic range	1 dB gain compression level to average noise level: >110 dB (0.1 to 1 GHz), >110 dB − f [GHz] dB (>1 GHz), >109 dB (0.1 to 1 GHz, with Option 08), >109 dB − 1.5f [GHz] dB (>1 GHz with Option 08) Distortion characteristics (RBW: 1 kHz) 2nd harmonic: >72.5 dB (10 to 200 MHz), >80 dB (200 to 500 MHz), >80 − f [GHz] dB (0.5 to 1.25 GHz), >82.5 − f [GHz] dB (0.8 to 1 GHz) 3rd order intermodulation: >80 dB (10 to 100 MHz), >83.3 dB (0.1 to 1 GHz), >83.3 dB − (2/3)f [GHz] dB (1 to 2.5 GHz)	
Functions	Input connector	NC-J, 75 Ω
	Auxiliary I/O	VIDEO OUTPUT (Y): 0 to 0.5 V ±0.1 V (typical; from lower edge to upper edge at 10 dB/div, 100 MHz, 75 Ω terminated) 0 to 0.4 V ±0.1 V (typical; from lower edge to upper edge at 10%/div, 100 MHz, 75 Ω terminated), BNC connector

• **Option 23: 75 Ω tracking generator (Option 12, 19, and 20 cannot be installed simultaneously)**

Frequency range	100 kHz to 2.5 GHz
Output level range	+44 to +104 dBμV (setting resolution: 0.1 dB)
Output level accuracy	≤±1.5 dB (100 MHz, output level: +104 dBμV)
Output level flatness	≤±1.75 dB (100 kHz to 2.5 GHz, output level: +104 dBμV, referenced to 100 MHz)
Output level linearity	≤±1.0 dB (+74 to +104 dBμV), ≤±2.0 dB (+44 to +74 dBμV) *100 kHz to 2.5 GHz, referenced to +104 dBμV
Spurious	Harmonics: ≤−20 dBc (100 kHz to 2.5 GHz), Non-harmonics: ≤−30 dBc (100 kHz to 2.5 GHz)
Tracking generator feed through	≤13.8 dBμV (spectrum analyzer input and tracking generator output connectors terminated at 75 Ω)
Output connector	NC-J, 75 Ω

• **Option 24: Television monitor (Brazil)**

Video	M-NTSC, M PAL, color
Audio	Simultaneous monitoring of video and audio *Needs Option 07
Functions	Channel: Automatic setting to broadcast wave of CCIR, Japan and USA; automatic setting to CATV of CCIR, Japan and USA Trigger: Triggered sweep by V-SYNC, H-SYNC *Needs trigger/gate circuit (Option 06) Aux. output: Composite video signal, Connector: BNC

Ordering information

Please specify model/order number, name, and quantity when ordering.

Model/order No.	Name	Model/order No.	Name
MS2661C	Main frame Spectrum Analyzer	J0055	Coaxial adapter (NC-P · BNC-J)
	Standard accessories	J0076	Coaxial adapter (NC-P · F-J)
	Power cord, 2.6 m: 1 pc	B0391A	Carrying case (hard type, with casters)
F0013	Fuse, 5 A: 2 pcs	B0391B	Carrying case (hard type, without casters)
W1251AE	MS2650B, MS2660B/C series operation manual: 1 copy	MP612A	RF Fuse Holder
B0329G	Front cover (3/4MW4U)	MP613A	Fuse Element
	Options	J0805	DC Block (MODEL 7003, 10 kHz to 18 GHz, ±50 V, Weinschel product)
MS2661C-01	Reference crystal oscillator	MA2507A	DC Block Adapter (50 Ω, 9 kHz to 3 GHz, ±50 V)
MS2661C-02	Narrow resolution bandwidth	MA8601A	DC Block Adapter (50 Ω, 30 kHz to 2 GHz, ±50 V)
MS2661C-04	High-speed time domain sweep	MA8601J	DC Block Adapter (75 Ω, 10 kHz to 2.2 GHz, ±50 V)
MS2661C-06	Trigger/gate circuit	MA1621A	50 Ω → 75 Ω Impedance Transformer (9 kHz to 3 GHz, ±100 V)
MS2661C-07	AM/FM demodulator	MP614B	50 Ω ↔ 75 Ω Impedance Transformer
MS2661C-08	Pre-amplifier	J0121	Coaxial cord (NC-P-3W · 3C-2WS · NC-P-3W), 1 m
MS2661C-10	Centronics interface (GPIB cannot be installed simultaneously.)	J0308	Coaxial cord (BNC-P · 3C-2WS · NC-P-3W), 1 m
MS2661C-12	QP detector (requires Option 02, QP-BW: 0.2/9/120 kHz)	J0063	Fixed attenuator for high power (30 dB, 10 W, DC to 12.4 GHz)
MS2661C-14	PTA parallel I/O (Option 10 cannot be installed simultaneously.)	J0395	Fixed attenuator for high power (30 dB, 30 W, DC to 9 GHz)
MS2661C-15	Sweep signal output	MP640A	Branch
MS2661C-19	DC coupled input (requires Option 02)	MP654A	Branch
MS2661C-20	Tracking generator	MP520A	CM Directional Coupler
MS2661C-21	Television monitor (Multi)	MP520B	CM Directional Coupler
MS2661C-22	75 Ω input (Option 12, 19 and 20 can not be installed simultaneously.)	MP520C	CM Directional Coupler
MS2661C-23	75 Ω tracking generator (Option 12, 19 and 20 can not be installed simultaneously.)	MP520D	CM Directional Coupler
MS2661C-24	Television monitor (Brazil)	MP526A	High Pass Filter
	Measurement softwares	MP526B	High Pass Filter
MX260002A	CDMA Cellular System Measurement Software	MP526C	High Pass Filter
MX260003A	PDC Measurement Software (for base station)	MP526D	High Pass Filter
MX260004A	GSM Measurement Software	MP526G	High Pass Filter
MX261001A	Low-Power Data Communication System Measurement Software conforming to issue of Direct Spread Spectrum System	MA1601A	High Pass Filter (800/900 MHz band, N)
MX261002A	Low-Power Data Communication System Measurement Software conforming to issue of Frequency Hopping System	J0007	GPIB cable, 1 m
MX262001A	CATV Measurement Software	J0008	GPIB cable, 2 m
MX264001A	EMI Measurement Software	J0742A	RS-232C cable, 1 m [for PC-98 Personal Computer and VP-600, D-sub 25 pins (straight)]
	Application parts	J0743A	RS-232C cable, 1 m [for AT compatible, D-sub 9-pins (cross)]
J0561	Coaxial cord (N-P-5W · 5D-2W · N-P-5W), 1 m	60N50-1	Reflection bridge
J0104A	Coaxial cord (BNC-P · RG-55/U · N-P), 1 m	60NF50-1	Reflection bridge
CSCJ-256K-SM	256 KB memory card (meets PCMCIA Rel. 2.0)	87A50	Reflection bridge
CSCJ-512K-SM	512 KB memory card (meets PCMCIA Rel. 2.0)	62N75	Reflection bridge
CSCJ-001M-SM	1024 KB memory card (meets PCMCIA Rel. 2.0)	62NF75	Reflection bridge
CSCJ-002M-SM	2048 KB memory card (meets PCMCIA Rel. 2.0)	MH648A	Pre-Amplifier
B0395A	Rack mount kit (IEC)	MP534A	Dipole Antenna
B0395B	Rack mount kit (JIS)	MP651A	Dipole Antenna
		BBA9106/VHA9103	Biconical Antenna
		MP635A	Log-Periodic Antenna
		MP666A	Log-Periodic Antenna
		MB9A	Tripod
		MB19A	Tripod
		MA2601B	EMI Probe
		MA2601C	EMI Probe
		KT-10	EMI Clamp
		KT-20	EMI Clamp