



# Agilent 8156A

## Optical Attenuator

Technical Specifications

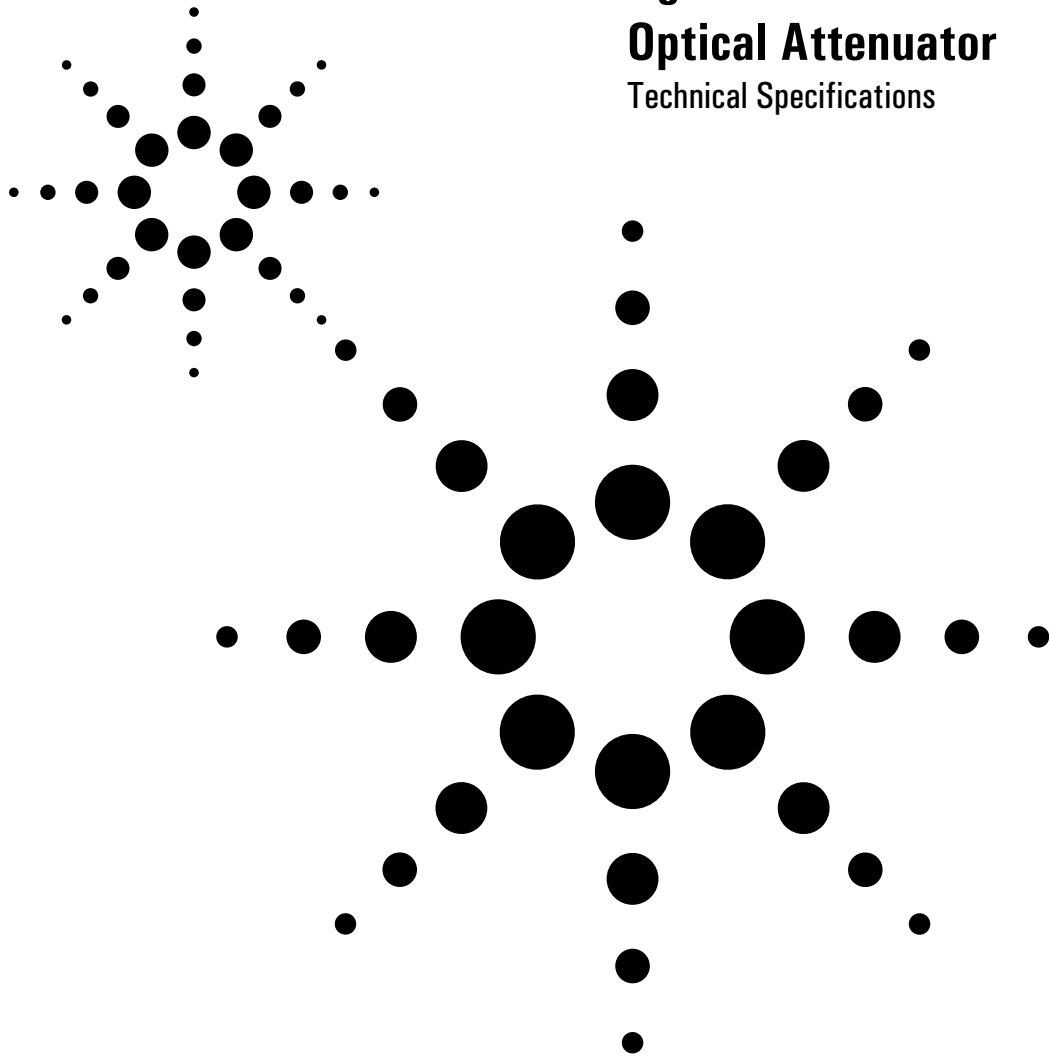

The Agilent 8156A is produced to the ISO 9001 international quality system standard as part of Agilent's commitment to continually increasing customer satisfaction through improved quality control.



**Agilent Technologies**

Specifications describe the instrument's warranted performance.

They are measured at 1310 nm and 1550 nm using a Fabry Perot laser source, single-mode fiber and Agilent 81000AI or Agilent 81000SI connector interfaces.

### Optical Attenuator Specifications - Standard Options

	Agilent 8156A #100	Agilent 8156A #101	Agilent 8156A #201
<b>Wavelength range</b>	1200 - 1650 nm		
<b>Attenuation range</b>	60 dB (excluding insertion loss)		
<b>Fiber type</b>	9/125 $\mu$ m single-mode		
<b>Connector type</b>	straight contact		angled contact
<b>Return loss<sup>(1)</sup></b>	> 35 dB	> 45 dB	> 60 dB
<b>Insertion loss (typ.)<sup>(2)</sup></b>	4.5 dB	2.5 dB	
<b>Attenuation accuracy (linearity)<sup>(3)</sup> typical</b>	< $\pm 0.2$ dB <sup>(4)</sup> < $\pm 0.1$ dB <sup>(4)</sup>	< $\pm 0.1$ dB < $\pm 0.05$ dB	
<b>Repeatability typical</b>	< $\pm 0.01$ dB < $\pm 0.005$ dB		
<b>Polarization dependent loss (PDL) typical</b>	< 0.15 dB <sub>pp</sub> < 0.075 dB <sub>pp</sub>	< 0.08 dB <sub>pp</sub> < 0.02 dB <sub>pp</sub>	
<b>Polarization mode dispersion (PMD)</b>	4 fs		
<b>Useful back reflection range</b>	9.0 - 35 dB	5.0 - 45 dB	5.0 - 60 dB

<sup>(1)</sup> Typical, depends on performance of external connector.

<sup>(2)</sup> Includes insertion loss of two HMS-10 connectors. Typical variation over temperature range < 0.3 dB<sub>pp</sub>.

<sup>(3)</sup> Measured at constant temperature.

<sup>(4)</sup> With narrow linewidth lasers, such as DFB lasers, power fluctuations up to 0.2 dB<sub>pp</sub> may occur.

### Ordering Information

Two connector interfaces are required for each Agilent 8156A.

**Agilent 8156A** optical attenuator mainframe (non-modular).

#### Options

**100** standard performance version.

**101** high performance version.

**201** high performance, high return loss version.

**202** back reflector kit for option 201 and

option 221 (consists of 1 ea

Agilent 81000SI,

Agilent 81000FI,

Agilent 81113PC,

Agilent 81000UM,

Agilent 81000BR).

**OB2** additional operating manual.

Specifications describe the instrument's warranted performance. They are measured at 1310 nm and 1550 nm using a Fabry Perot laser source, single-mode fiber and Agilent 81000AI or Agilent 81000SI connector interfaces.

### Optical Attenuator Specifications - Monitor Output Options

	Agilent 8156A #121	Agilent 8156A #221
Wavelength range	1200 - 1650 nm	
Attenuation range	60 dB (excluding insertion loss)	
Fiber type	9/125 $\mu$ m single-mode	
Connector type	straight contact	angled contact
Insertion loss (typ.) <sup>(1)</sup>	3.3 dB	3.3 dB
Return loss <sup>(2)</sup>	> 45 dB	> 60 dB
Attenuation accuracy (linearity) <sup>(3)</sup> typical	< $\pm$ 0.1 dB < $\pm$ 0.05 dB	< $\pm$ 0.1 dB < $\pm$ 0.05 dB
Repeatability typical	< $\pm$ 0.01 dB < $\pm$ 0.005 dB	< $\pm$ 0.01 dB < $\pm$ 0.005 dB
Polarization dependent loss (PDL) typical	< 0.1 dB <sub>pp</sub> < 0.03 dB <sub>pp</sub>	< 0.1 dB <sub>pp</sub> < 0.03 dB <sub>pp</sub>
Polarization mode dispersion (PMD)	6 fs	6 fs
Monitor output (typ.)	13 dB tap (1:20)	
Useful back reflection range	6.6 - 45 dB	6.6 - 60 dB

<sup>(1)</sup> Includes insertion loss of two HMS-10 connectors. Typical variation over temperature range < 0.3 dB<sub>pp</sub>.

<sup>(2)</sup> Typical, depends on performance of external connector.

<sup>(3)</sup> Measured at constant temperature.

### Ordering Information

Three connector interfaces are required for each Agilent 8156A.

**Agilent 8156A** optical attenuator mainframe (non-modular).

#### Options

**121** high performance version, monitor output.

**221** high performance, high return loss version, monitor output.

**203** back reflector kit for option 201 and option 221 (consists of 1 ea Agilent 81000SI, Agilent 81000FI, Agilent 81113PC, Agilent 81000UM, Agilent 81000BR).

**OB2** additional operating manual

Specifications describe the instrument's warranted performance. They are measured at 1300 nm using an LED source, multi-mode fiber and Agilent 81000AI connector interface.

### Optical Attenuator Specifications - Multimode Option

	<b>Agilent 8156A #350</b>
<b>Wavelength range</b>	1200 - 1650 nm
<b>Attenuation range</b>	60 dB (excluding insertion loss)
<b>Fiber type</b>	50/125 $\mu$ m multimode
<b>Connector type</b>	straight contact
<b>Insertion loss (typ.)<sup>(1)</sup></b>	3 dB
<b>Return loss<sup>(2)</sup></b>	22 dB
<b>Attenuation accuracy (linearity)<sup>(3)</sup></b>	< $\pm 0.1$ dB
<b>Typical</b>	< $\pm 0.08$ dB
<b>Repeatability</b>	< $\pm 0.01$ dB
<b>Typical</b>	$\pm 0.005$ dB

<sup>(1)</sup> Includes insertion loss of two HMS-10 connectors.

<sup>(2)</sup> Typical, depends on performance of external connector.

<sup>(3)</sup> Measured at constant temperature.

### Ordering Information

Two connector interfaces are required for each Agilent 8156A.

**Agilent 8156A** optical attenuator mainframe (non-modular).

#### Options

**350** 50/125 m multimode option.

**OB2** additional operating manual.

## Supplementary Performance Characteristics

**Minimum Attenuation Step:** 0.001 dB.

**Settling Time:** 20 ms to 400 ms (depending on actual setting).

**Maximum Input Level:** 23 dBm (200 mW).

### Operating Modes

**Attn:** Attenuation is displayed and can be varied.

$\lambda$ : Entering of wavelength for automatic correction of attenuation using typical correction values.

**Cal:** Offset factor to adjust display within 99.99 dB range.

**Disp** → **Cal:** Sets displayed attenuation value to 0.00 dB.

**Sweep:** Manual or automatic up and down sweep of attenuation. Start, stop, stepsize, and dwell time (not in manual mode) can be entered.

**Back Reflect:** For entering desired return loss (back reflection level). Return loss is displayed and can be varied within insertion loss and return loss of connector used. Requires Agilent 81000BR backreflector.

**Enable/Disable:** Optical signal path interrupted with shutter (> 80 dB blocking).

**Store/Recall:** 9 user-selectable parameter settings may be stored and recalled. Recall of default setting.

## General

**Recalibration period:** 1 year.

**Warm-up time:** not required if previously stored within operating temperature range.

**GPIB Capability:** all modes and parameters can be programmed, SCPI command set, Agilent 8157A compatibility mode.

**GPIB Interface Function Code:** SH1, AH1, T6, L4, SR1, RL1, PPO, DC1, DTO, CO.

## Environmental

**Storage temperature:** -40°C to +70°C.

**Operating temperature:** 0°C to +55°C.

**Humidity:** < 95% R.H. from 0°C to +40°C.

**Power:** 100/120/220/240 Vrms, 10%, 90 VA max., 48 – 400 Hz.

**Battery Back-up** (for non-volatile memory): with instrument switched off all current modes and data will be maintained for at least 10 years after delivery.

### Dimensions:

89 mm H, 212.3 mm W, 345 mm D (3.5" x 8.36" x 13.6").

**Weight:** net 5.3 kg (11.7 lbs), shipping 9.6 kg (21.2 lbs).

**Related Literature**

8156A Optical Attenuator  
Configuration Guide  
p/n 5963-3367E

For more information about Agilent Technologies test and measurement products, applications, services, and for a current sales office listing, visit our web site:

**[www.agilent.com/comms/lightwave](http://www.agilent.com/comms/lightwave)**

You can also contact one of the following centers and ask for a test and measurement sales representative.

United States:  
Agilent Technologies  
Test and Measurement Call Center  
P.O. Box 4026  
Englewood, CO 80155-4026  
(tel) 1 800 452 4844

Canada:  
Agilent Technologies Canada Inc.  
5150 Spectrum Way  
Mississauga, Ontario  
L4W 5G1  
(tel) 1 877 894 4414

Europe:  
Agilent Technologies  
Test & Measurement  
European Marketing Organisation  
P.O. Box 999  
1180 AZ Amstelveen  
The Netherlands  
(tel) (31 20) 547 9999


Japan:  
Agilent Technologies Japan Ltd.  
Measurement Assistance Center  
9-1, Takakura-Cho, Hachioji-Shi,  
Tokyo 192-8510, Japan  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

Latin America:  
Agilent Technologies  
Latin American Region Headquarters  
5200 Blue Lagoon Drive, Suite #950  
Miami, Florida 33126  
U.S.A.  
(tel) (305) 267 4245  
(fax) (305) 267 4286

Australia/New Zealand:  
Agilent Technologies Australia Pty Ltd  
347 Burwood Highway  
Forest Hill, Victoria 3131  
(tel) 1-800 629 485 (Australia)  
(fax) (61 3) 9272 0749  
(tel) 0 800 738 378 (New Zealand)  
(fax) (64 4) 802 6881

Asia Pacific:  
Agilent Technologies  
24/F, Cityplaza One, 1111 King's Road,  
Taikoo Shing, Hong Kong  
(tel) (852) 3197 7777  
(fax) (852) 2506 9284

Data subject to change.  
Copyright © 2000 Agilent Technologies  
Printed in U.S.A. February, 15 2001  
p/n 5962-8631E

**Agilent Technologies**