

Keysight Technologies

6540A Series Single-Output, 200 W DC Power Supplies

Data Sheet





Introduction

Speed and accuracy for test optimization

This reliable series of 200 W DC power supplies can be controlled either from the front panel or via an analog programming voltage. When used in a test system, the fast up and down programming helps decrease test time. Quickly reacting protection features, including fast crowbar, CV/CC mode crossover and over-voltage protection help protect your valuable assemblies from damage. The linear topology produces very low ripple and noise, which allows you to make extremely accurate measurements of the devices which you are testing.

Lab bench use is enhanced by the fan speed control, which helps to minimize acoustic noise.

Specifications

Specifications (at 0 to 55°C unless otherwise specified)	6541A	6542A	6543A	6544A	6545A
Number of outputs	1	1	1	1	1
GPIO	No	No	No	No	No
Output ratings					
Voltage	0 to 8 V	0 to 20 V	0 to 35 V	0 to 60 V	0 to 120 V
Current	0 to 20 A	0 to 10 A	0 to 6 A	0 to 3.5 A	0 to 1.5 A
Maximum current (50°C/55°C)	18 A/17 A	9 A/8.5 A	5.4 A/5.1 A	3.2 A/3 A	1.4 A/1.3 A
Programming accuracy (at 25 °C ± 5°C)					
Voltage 0.06% +	5 mV	10 mV	15 mV	26 mV	51 mV
Current 0.15% +	26 mA	13 mA	6.7 mA	4.1 mA	1.7 mA
Ripple and noise from 20 Hz to 20 MHz					
Voltage rms	300 µV	300 µV	400 µV	500 µV	700 µV
peak-to-peak	3 mV	3 mV	4 mV	5 mV	7 mV
Current rms	10 mA	5 mA	3 mA	1.5 mA	1 mA
Load regulation					
Voltage	1 mV	2 mV	3 mV	4 mV	5 mV
Current	1 mA	0.5 mA	0.25 mA	0.25 mA	0.25 mA
Line regulation					
Voltage	0.5 mV	0.5 mV	1 mV	1 mV	2 mV
Current	1 mA	0.5 mA	0.25 mA	0.25 mA	0.25 mA

Transient response time

Less than 100 µs for the output voltage to recover to its previous level (within 0.1% of the voltage rating of the supply or 20 mV, whichever is greater) following any step change in load current of up to 50% of the output current rating of the supply

Supplemental characteristics (Non-warranted characteristics determined by design and useful in applying the product)	6541A	6542A	6543A	6544A	6545A
Average programming resolution					
Voltage	2 mV	5 mV	10 mV	15 mV	30 mV
Current	6 mA	3 mA	2 mA	1.2 mA	0.5 mA
OVP	13 mV	30 mV	54 mV	93 mV	190 mV
OVP accuracy	160 mV	400 mV	700 mV	1.2 V	2.4 V

Specifications, continued

Specifications <i>(at 0 to 55°C unless otherwise specified)</i>	6541A-J04 Special order option	6544A-J09 Special order option	6545A-J05 Special order option
Number of outputs	1	1	1
GPIO	No	No	No
Output ratings			
Voltage	13 V	70 V	150 V
Current	15.3 A	3 A	1.2 A
Maximum current (50°C/55°C)	13.77 A/13 A	2.7 A/2.55 A	1.08 A/1.02 A
Programming accuracy (at 25°C ±5°C)			
Voltage 0.06% +	8.5 mV	31 mV	65 mV
Current 0.15% +	21 mA	4.1 mA	1.7 mA
Ripple and noise from 20 Hz to 20 MHz			
Voltage rms	300 µV	600 µV	900 µV
peak-to-peak	3 mV	6 mV	9 mV
Current rms	8 mA	1.5 mA	1 mA
Load regulation			
Voltage	1 mV	4.5 mV	7 mV
Current	1 mA	0.25 mA	0.25 mA
Line regulation			
Voltage	0.5 mV	1.5 mV	2.5 mV
Current	1 mA	0.25 mA	0.25 mA

Transient response time

Less than 100 µs for the output voltage to recover to its previous level (within 0.1% of the voltage rating of the supply or 20 mV, whichever is greater) following any step change in load current of up to 50% of the output current rating of the supply

Supplemental characteristics <i>(Non-warranted characteristics determined by design and useful in applying the product)</i>	6541A-J04 Special order option	6544A-J09 Special order option	6545A-J05 Special order option
Average programming resolution			
Voltage	3.5 mV	1.4 mV	37.5 mV
Current	5 mA	1.2 mA	0.5 mA
OVP	23 mV	110 mV	250 mV
OVP accuracy	260 mV	1.5 mV	3 V

Supplemental characteristics for all model numbers

DC floating voltage: Output terminals can be floated up to ± 240 VDC from chassis ground

Remote sensing: Up to half the rated output voltage can be dropped in each load lead. The drop in the load leads subtracts from the voltage available for the load.

Output programming response time: The rise and fall time (10/90% and 90/10%) of the output voltage is less than 15 ms. The output voltage change settles within 1 LSB (0.025% x rated voltage) of final value in less than 60 ms.

Down programming: An active down programmer sinks approximately 20% of the rated output current

Modulation: (Analog programming of output voltage and current)

Input signal: 0 to -5 V

Input impedance: 10 kΩ nominal

AC input:

(AC input frequency 47 to 63 Hz)

Voltage	100 VAC	120 VAC	220 VAC	240 VAC
Current	4.4 A	3.8 A	2.2 A	2.0 A

Input power: 480 VA, 400 W at full load; 60 W at no load


Regulatory compliance: Conforms to UL1244 and IEC 61010-1

Size:

425.5 mm W x 88.1 mm H x 439 mm D
(16.75 in x 3.5 in x 17.3 in)

Weight: Net, 14.2 kg (31.4 lb); shipping, 16.3 kg (36 lb)

Keysight Technologies models: 6541A, 6542A, 6543A, 6544A, 6545A

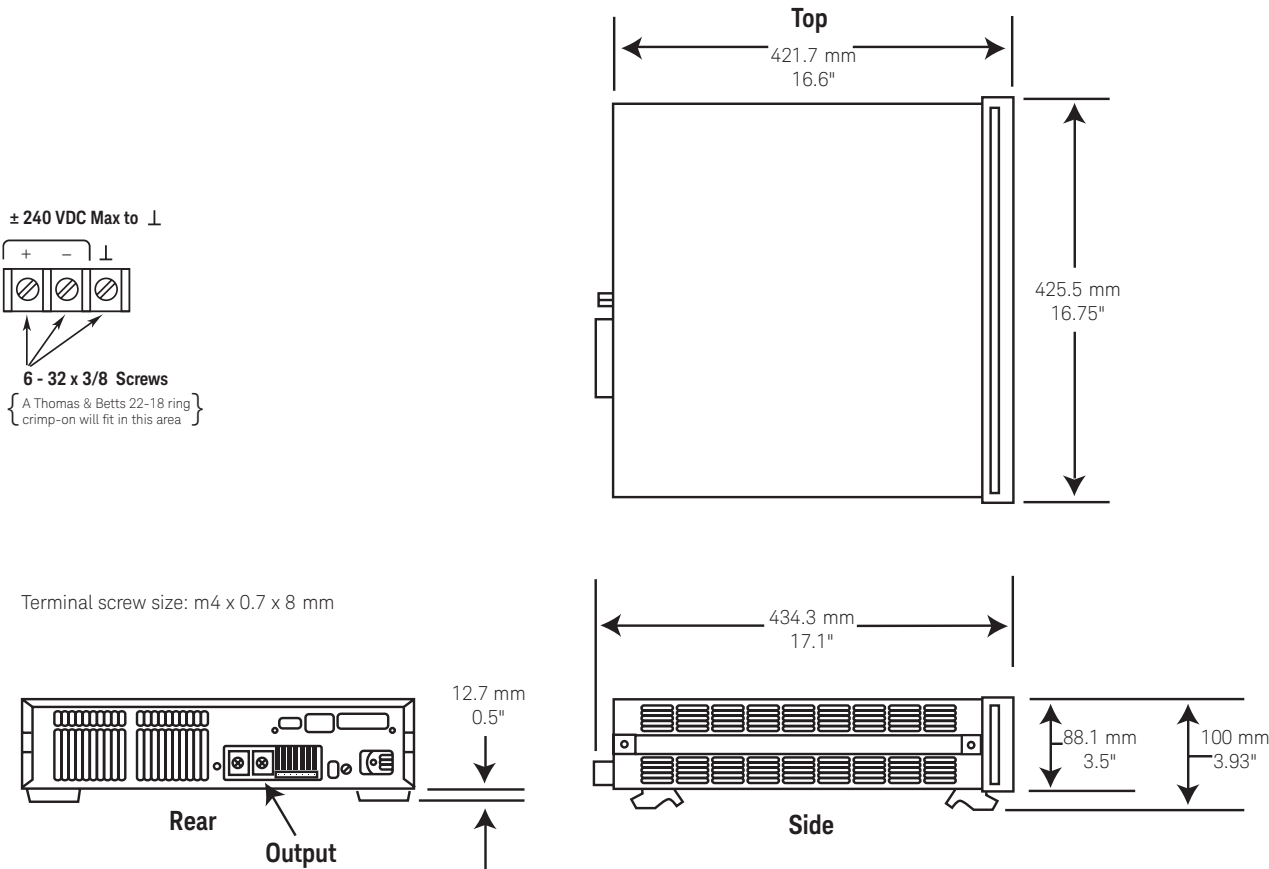

Ordering information

- Opt 100** 87 to 106 VAC, 47 to 63 Hz
Opt 120 104 to 127 VAC, 47 to 63 Hz
Opt 220 191 to 233 VAC, 47 to 63 Hz
Opt 240 209 to 250 VAC, 47 to 63 Hz

Opt 0L1 Full documentation on CD-ROM and printed user's guide. CD-ROM includes user's guide, service manual, and quick start guide

Opt 0B3 Printed service manual

Accessories

1CM002A* Rack mount flange kit
88.1 mm H (2U), 1.75 inch hole
spacing, two flange brackets

1CP001A* Rack mount flange and
handle kit 88.1 mm H (2U), two
brackets and front handles

E3663AC Support rails for Keysight
rack cabinets

p/n 1494-0060 Accessory slide kit

Application notes

*10 Practical Tips You Need to Know
About Your Power Products,*
5965-8239E

*Understanding Linear Power Supply
Operation (AN1554),* 5989-2291EN

* Support rails required

